weathertex

timber made perfect, naturally

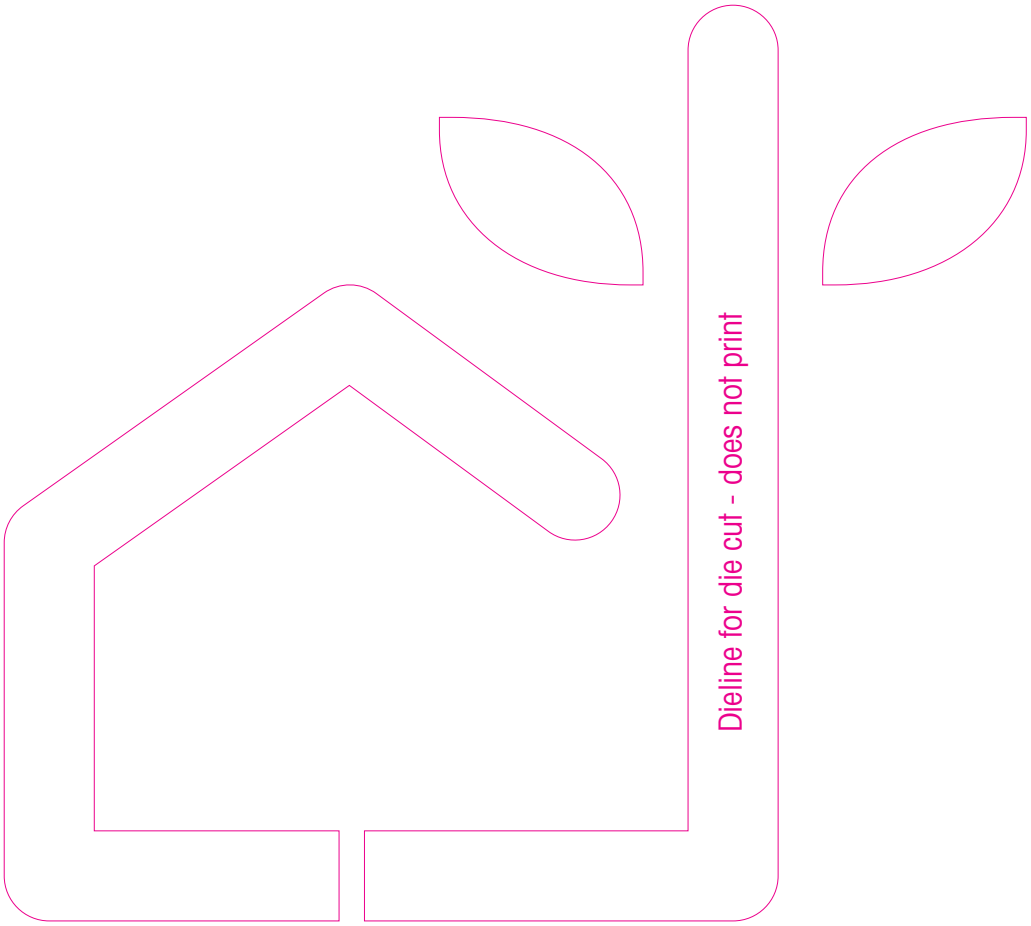

product portfolio

Weathergroove 150 Smooth

What is Weathertex?

Weathertex is a manufacturer of natural Australian hardwood Weatherboards and Architectural Panels. Weathertex's products are made in Raymond Terrace, NSW, at the original 1939 factory. Massive investment in production upgrades, computerisation and painting facilities have been made since Weathertex's introduction, in 1962.

100% Australian owned and manufactured, Weathertex uses certified state forest or private hardwoods from controlled sources. The logs are then chipped, pulped and pressed with 3% natural wax to make Australian timber products that are natural and perfect.

Proud and determined to promote environmental and sustainable performance measures, Weathertex has worked hard to ensure its products have a better than zero carbon footprint on the environment.

Have you heard of the Programme for the Endorsement of Forest Certification, or PEFC? The Programme is an international non-profit, non-governmental organization dedicated to promoting Sustainable Forest Management through independent third-party certification.

PEFC works through the entire forest supply chain promoting good forest practices and ensuring that timber and non-timber forest products are produced following the highest ecological, social and ethical standards. The PEFC logo enables customers and consumers to identify products from sustainably managed forests.

As an umbrella organization, PEFC endorses national forest certification systems developed through multi-stakeholder processes and tailored to local priorities and conditions. In Australia, the PEFC - endorsed national certification system is the Australian Forestry Certification Scheme, which is underpinned by AS4707 AFCS Chain of Custody Standard and AS4708 Australian Forestry Standard.

With over 30 endorsed national certification systems and more than 240 million hectares of certified forests, PEFC is the world's largest forest certification system.

Weathertex undergoes rigorous third-party assessment against PEFC's Sustainability Benchmarks to ensure consistency with international requirements. With a continuing commitment to the PEFC scheme, Weathertex supports the sustainable management of Australian forests, promotes Australian made products while supporting the work force in Australia.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.

For further information please go to http://www.pefc.org/

a member of the green product community
VERIFIED PRODUCT FIND US ON ecospecifier .com.au trust brands
PEFC™ PEFC/21-31-09

Mason Gun

Infrared Curing Oven

Sustainability

Why choose Weathertex?

- **Low maintenance** – on average, repainting is required every 15 years.
- **Value for money** – lightweight product, single person installation.
- **Australian made and owned** – proudly made in Newcastle, NSW.
- **Carbon Storage** – better than zero carbon footprint.
- **Easy to install** – only standard carpenter's tools are required.
- **Warranty** – will not rot, split or crack for 25 years.
- **Longevity** – natural Australian timber, made to last.
- **Safe** – can be sawn or cut indoors.
- **Quicker to install** – direct fix to frame.

Weathergroove 150 Smooth

GUARANTEED NOT TO 25* YEAR SPLIT, CRACK OR ROT

BETTER THAN ZERO CARBON FOOTPRINT

NO CHEMICAL ADDITIVES

AUSTRALIAN 100% MADE & OWNED

TESTED & PROVEN 45 FOR OVER 45 YEARS

AUSTRALIAN HARDWOOD

* Refer to the Weathertex Manufacturer's Warranty Conditions

Peter Downes Design
Selflok Millwood Smooth

Selflok Weatherboards

A favourite in the Weathertex family, Selflok Weatherboards have the simplest self-locking system, which allows every board to align perfectly without effort. The precise routing gives the product that beautiful and unique ship lapped profile that makes it the first choice for many. Complete a perfect job with the Weathertex concealed joining system, to get the seamless lines that the Selflok range offers.

New to the Selflok range are the increasingly popular Selflok Ecogroove Weatherboards. The Selflok Ecogroove Smooth is the ideal choice for a smooth-to-touch finish, whereas the Selflok Ecogroove Woodsman provides the distinct wood grain texture of natural timber. Both are available in a range of different sizes.

Advantages

- The unique lapping system allows a quick, flawless installation.
- It is a durable and lightweight product.
- Requires only standard DIY cutting tools.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.

Selflok Texwood Smooth

GJ Gardner Homes
Selflok Ecogroove 300 Smooth

PEFC™
PEFC/21-31-09
Selflok Ecogroove Range

GUARANTEED 25 YEAR NOT TO SPLIT, CRACK OR ROT

* Refer to the Weathertex Manufacturer's Warranty Conditions



SELFLOK ECOGROOVE 150^ SMOOTH
Width: 300mm

SELFLOK ECOGROOVE 150^ WOODSMAN
Width: 300mm



SELFLOK ECOGROOVE 300^ SMOOTH
Width: 300mm



SELFLOK ECOGROOVE 300^ WOODSMAN
Width: 300mm

SELFLOK MILLWOOD SMOOTH
Width: 300mm

SELFLOK MILLWOOD RUFF-SAWN
Width: 300mm

SELFLOK TEXWOOD SMOOTH
Width: 300mm

SELFLOK OLD COLONIAL SMOOTH
Width: 300mm

*All Weatherboards are 3660 mm in length and 9.5 mm in thickness. ^ Refers to groove spacing.

Ansa Homes
Selflok Ecogroove 300 Smooth

Ansa Homes
Selflok Ecogroove 300 Smooth

Stylish Concepts Pty Ltd
Weathergroove 150 Ruff Sawn and Selflok Ecogroove 300 Smooth

JG King Projects
Selflok Ecogroove 150 Smooth

JG King Projects
Selflok Ecogroove 150 Smooth

Additions Pty Ltd
Selflok Ecogroove 150 Smooth

Amazing Homes
Selflok Millwood Smooth

Coastal Construction
Selflok Millwood Smooth

JG King Projects
Selflok Ecogroove 150 Smooth

JG King Projects
Selflok Ecogroove 150 Smooth

Metricon Town Living
Selflok Ecogroove 150 Smooth and ExteriorBoard High ImpactBoard Smooth

Metricon Town Living
Selflok Ecogroove 300 Smooth and Weathergroove 150 Smooth

JG King Projects
Selflok Ecogroove 150 Smooth

JG King Projects
Selflok Ecogroove 150 Smooth and ExteriorBoard/High ImpactBoard Smooth

Relaxed Living Homes
Selflok Ecogroove 150 Smooth

Selflok Ecogroove 150 Smooth

Metricon Town Living
Selflok Ecogroove 150 Smooth and ExteriorBoard High ImpactBoard Smooth

Metricon Town Living
Selflok Ecogroove 300 Smooth and Weathergroove 150 Smooth

Selflok Ecogroove 300 Smooth

Selflok Ecogroove 150 Smooth

Selflok Ecogroove 150 Smooth

Unity Building Group
Selflok Ecogroove 300 Smooth

Selflok Ecogroove 300 Smooth

Selflok Ecogroove 300 Smooth

Selflok Ecogroove 150 Smooth

St Trinity
Selflok Ecogroove 300 Smooth

Selflok Ecogroove 150 Smooth

Selflok Ecogroove 150 Smooth

Risen Developments
Selflok Ecogroove 150 Smooth

Peter Downes Design
Primelok 200 Smooth

Primelok Weatherboards

Our exclusive Weathertex Primelok fixing system ensures a perfect and easy alignment of the boards, reducing installation time by up to 20%. The overlapping of each board **conceals fixings**, resulting in smooth, clean, straight lines.

Primelok Weatherboards are suitable for gun nailing installation, and pre-primed as a standard feature.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.

Primelok Braidwood Smooth

Primelok Shadowood Smooth

GUARANTEED NOT TO SPLIT, CRACK OR ROT 25 YEAR*

* Refer to the Weathertex Manufacturer's Warranty Conditions



PRIMELOK SMOOTH
Width: 200mm

PRIMELOK RUFF-SAWN
Width: 200mm



PRIMELOK WOODSMAN
Width: 200mm



PRIMELOK BRAIDWOOD SMOOTH
Width: 200mm

PRIMELOK BRAIDWOOD RUFF-SAWN
Width: 200mm

PRIMELOK FEDERATION SMOOTH
Width: 170mm

PRIMELOK FEDERATION RUFF-SAWN
Width: 170mm

PRIMELOK SHADO-WOOD SMOOTH
Width: 170mm

* All Weatherboards are 3660 mm in length and 9.5 mm in thickness.

Primelok Shadowood Smooth

Defence Housing Australia
Primelok Shadowood Smooth

Defence Housing Australia
Primelok Shadowood Smooth

Defence Housing Australia.
Primelok Shadowood Smooth

Defence Housing Australia
Primelok Shadowood Smooth

BRD Group
Primelok Federation Smooth

Defence Housing Australia
Primelok Shadowood Smooth

Graybuilt
Primelok Shadowood Smooth

Diverse Property Group
Primelok Federation Smooth

Diverse Property Group
Primelok Federation Smooth

Driscoll Carvey Building Design and Interiors
Primelok Federation Smooth

Diverse Property Group
Primelok Federation Smooth

Driscoll Carvey Building Design and Interiors
Primelok Federation Smooth

Estia Constructions
Primelok Classic Smooth

Estia Constructions
Primelok Classic Smooth

Defence Housing Australia
Primelok Shadowood Smooth

Defence Housing Australia
Primelok Shadowood Smooth

Diverse Property Group
Primelok Federation Smooth

Stephen Akehurts and Associates
Primelok Classic Smooth

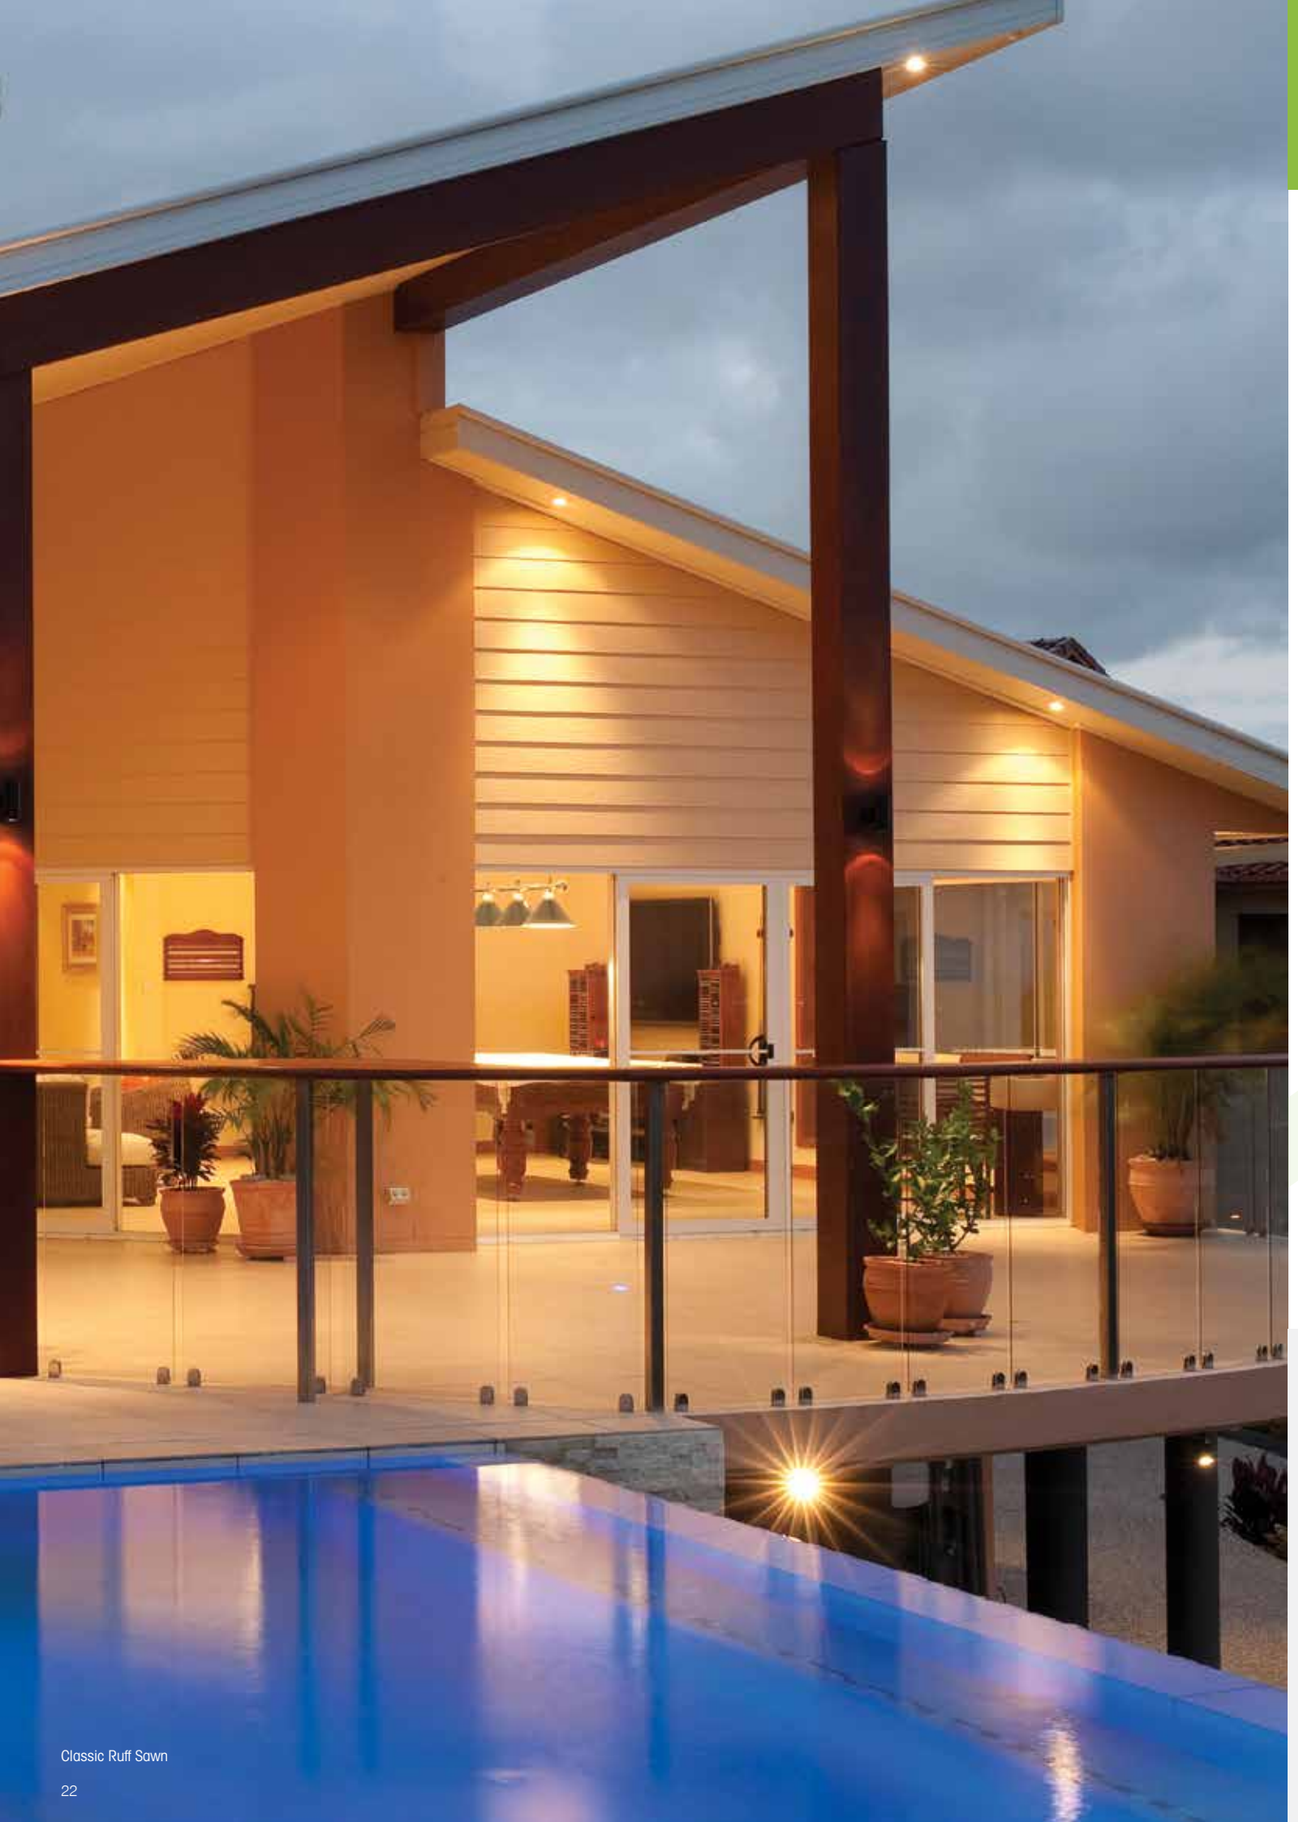

Classic Ruff Sawn

Classic Weatherboards

Weathertex Classic Weatherboards are truly an Australian classic. Choose Smooth or Ruff-Sawn surface finishes to create a clean, smart-looking home.

Weathertex Weatherboards are designed to blend beautifully with alternate building materials such as brick, render, stone and, of course, Weathertex Architectural Panels, providing limitless design and decorative solutions and applications.

Weathertex will complete your home with a high quality, highly durable and low maintenance product.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.

Classic Smooth

Optima Building Design
Classic Rusticated Ruff-Sawn

GUARANTEED NOT TO 25 YEAR SPLIT, CRACK OR ROT

* Refer to the Weathertex Manufacturer's Warranty Conditions

CLASSIC
SMOOTH

Width: 200 or 300mm

CLASSIC
RUFF-SAWN

Width: 200 or 300mm

CLASSIC RUSTICATED
SMOOTH

Width: 200mm

CLASSIC RUSTICATED
RUFF-SAWN

Width: 200mm

*All Weatherboards are 3660 mm in length and 9.5 mm in thickness.

Local Homes
Primelok Classic Smooth

Stephen Akehurts and Associates
Primelok Classic Smooth

Local Homes.
Primelok Classic Smooth

MJB Homes
Primelok Classic Smooth

Relaxed Living Homes
Primelok Classic Smooth

MJB Homes
Primelok Classic Smooth

Estia Constructions
Primelok Classic Smooth

Estia Constructions
Primelok Classic Smooth

Estia Constructions
Primelok Classic Smooth

Peter Downes Design
Weathergroove 150 Smooth

Weathergroove

Weathergroove is the largest panel product available in the Australian market. This vertically grooved panel is ideal for covering large areas in a short time and it's versatility offers endless possibilities.

For improved performance, an exclusive joining system has been designed to clip onto the rebated edges of each panel, blending in perfectly with each Weathergroove sheet for a continuous panel finish. Weathergroove also provides a safe and reliable means of structural bracing. Please see the Weathertex Installation Guide for details.

Advantages

- Off-stud joining system
- Quick installation
- No silicone or adhesives required for installation

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.



WEATHERGROOVE
150 SMOOTH



WEATHERGROOVE
150 RUFF-SAWN



WEATHERGROOVE
150 WOODSMAN



WEATHERGROOVE
300 SMOOTH*

WEATHERGROOVE
600 SMOOTH*

WEATHERGROOVE
1200 SMOOTH*

* Only available in 3660mm x 1196mm and 2745mm x 1196mm

Metricon Town Living
Weathergroove 150 Smooth

Sophie Solomon Design
Weathergroove 150 Woodsman

PEFC™
PEFC/21-31-09

* Refer to the Weathertex Manufacturer's Warranty Conditions

GUARANTEED NOT TO 25 YEAR OR ROT SPLIT, CRACK

WEATHERGROOVE SIZES

Groove spacing: 150mm

3660 x 1196mm 2440 x 1196mm
2745 x 1196mm

Thickness: 9.5mm

Benson McCormack Architects
Weathergroove 150 Smooth

Defence Housing Australia
Weathergroove 150 Smooth and Primelok Shadowood Smooth

Benson McCormack Architects
Weathergroove 150 Smooth

Stylish Concepts Pty Ltd
Weathergroove 150 Ruff Sawn

Benson McCormack Architects
Weathergroove 150 Smooth

Benson McCormack Architects
Weathergroove 150 Smooth

Benson McCormack Architects
Weathergroove 150 Smooth

Defence Housing Australia
Weathergroove 150 Smooth and Primelok Shadowood Smooth

Defence Housing Australia
Weathergroove 150 Smooth

Wolfdene Built
Weathergroove 150 Smooth

Driscoll Carvey Building Design and Interiors
Weathergroove 150 Smooth

Figurehead Constructions
Weathergroove 150 Woodsman

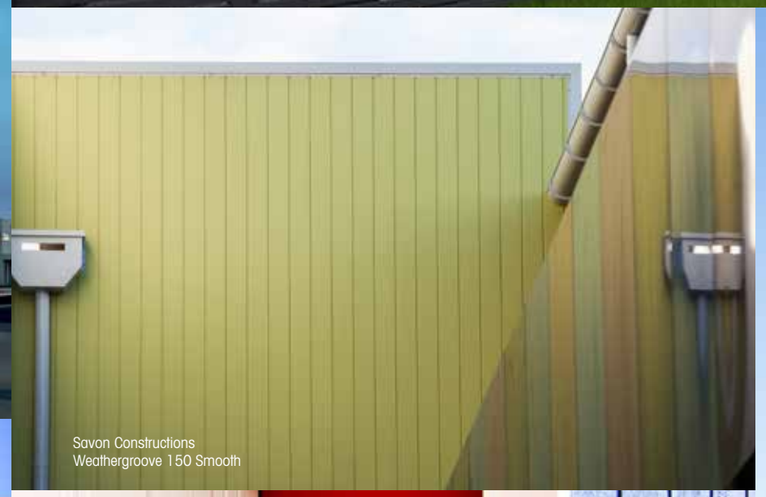

Savon Constructions
Weathergroove 150 Smooth

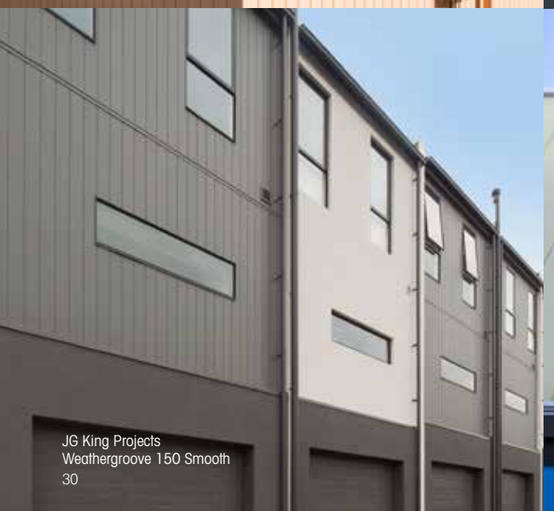

JG King Projects
Weathergroove 150 Smooth

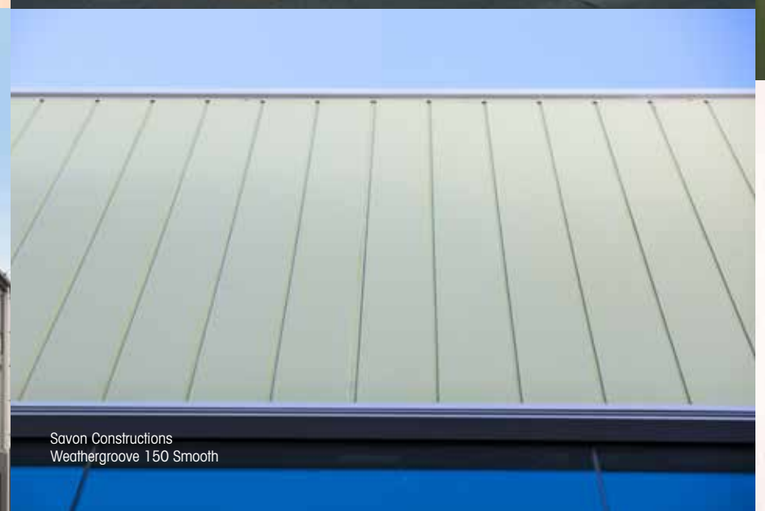

Savon Constructions
Weathergroove 150 Smooth

Suntech Design
Weathergroove 150 Woodsman

Metricon Town Living
Weathergroove 150 Smooth

Sophie Solomon Design
Weathergroove 150 Woodsman

Weathergroove 150 Smooth

Weathergroove 150 Smooth

Weathergroove 150 Smooth and Selflok Vgroove 150 Natural

Weathergroove 150 Smooth

Weathergroove 150 Smooth

Wolfdene Built
Weathergroove 150 Smooth

Weathergroove 150 Woodsman and Weathergroove 150 Smooth

Weathergroove 150 Smooth

Builtsmart Modular
Rubix Panel Smooth and Selflok Ecogroove 150 Smooth

Rubix Panel

Rubix Panel is the newest and easiest paneling system to hit the market. Rubix Panel is a self-locking Architectural Panel available in square or rectangular panels designed to be joined on or off-stud.

Rubix Panel provides unprecedented flexibility and ease of installation.There is no need to pre-plan the stud layout and no joining accessories are required.

Rubix Panel is a revolutionary product, eliminating the building puzzle of external and internal matrix style applications.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.

Macquarie Life Church
Rubix Panel Smooth

Rubix Panel Smooth

Rubix Panel Smooth

RUBIX PANEL
SMOOTH

GUARANTEED 10* YEAR NOT TO SPLIT, CRACK OR ROT

* Refer to the Weathertex Manufacturer's Warranty Conditions

RUBIX PANEL SIZES	
1200 x 1200mm	1200 x 900mm
Thickness: 9.5mm	

BRD Group
Rubix Panel Smooth

Martins Building
Rubix Panel Smooth

Rob Tate Homes
Rubix Panel Smooth

BRD Group
Primelok Federation Smooth and Rubix Panel Smooth

Builtsmart Modular
Rubix Panel Smooth

Pace Development Group,
Weathergroove 150 Smooth and ExteriorBoard/High ImpactBoard Smooth

Australand Holdings Ltd
Weathergroove 150 Natural

Selflok Millwood Smooth

Schreiber Hamilton Architecture
Weathergroove 150 Smooth

ExteriorBoard/High ImpactBoard Smooth

ExteriorBoard/High ImpactBoard Smooth

Primelok Shadowood Smooth

Jodie Dixon Architecture Selflok Ecogroove 150 Natural

Natural

The new Natural range is a natural (unprimed) board which provides a unique appearance, with the characteristics and looks of raw, undressed timber. The Natural surface is pressed to create a woodgrain effect. Its rough, deep cut pattern shows all the knots, cracks and imperfections of natural timber. It can be left to weather naturally or be stained.

When the Natural surface is oiled, the look of fresh brown timber is maintained. When allowed to weather naturally, the depth of colour will vary, subject to location and sun exposure.

Weathertex's natural finished products are covered by a 7 year warranty not to rot, split or crack. Please see the warranty section of the Weathertex website for full details.

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.

Selflok Vgroove 150 Natural

Jodie Dixon Architecture
Selflok Ecogroove 150 Natural

PEFC™
PEFC/21-31-09

GUARANTEED NOT TO SPLIT, CRACK OR ROT 7* YEAR

* Refer to the Weathertex Manufacturer's Warranty Conditions

CLASSIC
WALL SHINGLES

Length: 1195mm
Width: 225mm



SELFLOK ECOGROOVE
150^NATURAL

Width: 300mm

SELFLOK ECOGROOVE
300^NATURAL

Width: 300mm

SELFLOK VGROOVE
150^NATURAL

Width: 300mm

SELFLOK VGROOVE
300^NATURAL

Width: 300mm

WEATHERGROOVE
150 NATURAL

3660 x 1196mm

WEATHERGROOVE
300 NATURAL

3660 x 1196mm

EXTERIORBOARD/HIGH
IMPACTBOARD NATURAL

3660 x 1220mm

* All Weatherboards are 3660 mm in length and 9.5 mm in thickness. ^ Refers to groove spacing

DL Constructions
Weathergroove 150 Natural

Precon Living
Selflok Ecogroove 150 Natural

Shengri La Constructions
Selflok Ecogroove 150 Natural

Weathergroove 150 Smooth and Selflok Vgroove 150 Natural

Mosswood Homes
Weathergroove 150 Natural

Richard Lutze and Associates ExteriorBoard/ High ImpactBoard Smooth

ExteriorBoard/High ImpactBoard

ExteriorBoard/High ImpactBoard is one of the most durable and versatile type of panel available. The possibility of both vertical and horizontal express jointing lends flexibility to the pattern of your choice. Whether a modern architecturally designed home or a large commercial project, the decorative applications are unlimited.

ExteriorBoard/High ImpactBoard is an ideal choice when facing lightweight constraints. It complies with the requirements set by the External Hardboard in AS/NZS 1859.4: it is a strong and robust product, yet lightweight and the large size panels make installation quick and easy.

ExteriorBoard/High ImpactBoard durability makes it the best choice for:
- Wall and façade linings
- Exhibition buildings, sports facilities and entertainment centers linings
- School halls
- Decorative linings in homes and commercial premises

Weathertex can be used as an external wall cladding in bushfire attack levels up to and including BAL 19 construction.

ExteriorBoard/High ImpactBoard Smooth

PEFC™
PEFC/21-31-09

* Refer to the Weathertex Manufacturer's Warranty Conditions

GUARANTEED
NOT TO
10 YEAR
OR ROT
SPLIT, CRACK

EXTERIORBOARD/HIGH IMPACTBOARD SMOOTH

EXTERIORBOARD/HIGH IMPACTBOARD WOODSMAN (Available in 3660mm only)

EXTERIORBOARD/HIGH IMPACTBOARD SMOOTH SIZES	
3660 x 1220mm	2745 x 1220mm
2440 x 1220mm	
Thickness: 9.5mm	

Arden Developments
ExteriorBoard High ImpactBoard Smooth

ClarkeHopkinsClarke
Selflok Ecogroove 150 Natural and ExteriorBoard High ImpactBoard Smooth

Joemark Builders
Selflok Ecogroove 150 Natural and ExteriorBoard High ImpactBoard Smooth

Metricon Town Living
ExteriorBoard High ImpactBoard Smooth

Metricon Town Living
Selflok Ecogroove 150 Smooth and ExteriorBoard High ImpactBoard Smooth

Metricon Town Living
Selflok Ecogroove 150 Smooth and ExteriorBoard High ImpactBoard Smooth

Shangri La Constructions
Selflok Ecogroove 150 Natural and ExteriorBoard High ImpactBoard Smooth

Weathertex Accessories Range

ACCESSORIES	LENGTH (mm)	SUITED TO:	
Traditional Joiners	300, 200 and 170	Classic, Selflok and Primelok	
Concealed Joiners	300, 200 and 170	Classic, Selflok and Primelok	
PVC Deep Channel Joiners	3660	ExteriorBoard High ImpactBoard	
Weathergroove Vertical Joiners	3660, 2745, 2440	All Weathergroove Panels	

Trimtec Aluminium Accessories

ACCESSORIES	LENGTH (mm)	SUITED TO:	
Aluminium Z Flashing	3660	Weathergroove, ExteriorBoard/High ImpactBoard. Other products as required	
Aluminium Vertical T Joiner	3660	Selflok, Weathergroove, ExteriorBoard/High ImpactBoard	
Aluminium Deep Channel Joiner	3660	ExteriorBoard/High ImpactBoard	
Aluminium End Stop	Small 3660 Large 3000	Selflok, Weathergroove, ExteriorBoard/High ImpactBoard Classic, Primelok	
Traditional Internal Aluminium Corner	Small 3660 Large 3000	Selflok, Weathergroove, ExteriorBoard/High ImpactBoard Classic, Primelok	
Traditional External Aluminium Corner	Small 3660 Large 3000	Selflok, Weathergroove, ExteriorBoard/High ImpactBoard Classic, Primelok	
LF Internal Aluminium Corner	Small 3660 Large 3000	Selflok, Weathergroove, ExteriorBoard/High ImpactBoard Classic, Primelok	
LF External Aluminium Corner	Small 3660 Large 3000	Selflok, Weathergroove, ExteriorBoard/High ImpactBoard Classic, Primelok	
Window Surround	Small 3660 Large 3660	Selflok, Weathergroove, ExteriorBoard/High ImpactBoard Classic, Primelok	
Window Corner		Suited to finish corner junctions between window surrounds and LF corners	

This is a brief listing only, for a more comprehensive list and details on our accessories range please visit www.weathertex.com.au and view online or refer to our Weathertex Installation Guide.

Weathergroove 150 Smooth

OTS Archiitecture,
ExteriorBoard/High ImpactBoard Smooth

weathertex
timber made perfect, naturally

www.weathertex.com.au Ph: 1800 040 080 Fax: 1800 647 926

GUARANTEED NOT TO 25* YEAR SPLIT, CRACK OR ROT | BETTER THAN ZERO CARBON FOOTPRINT | NO CHEMICAL ADDITIVES | AUSTRALIAN 100% MADE & OWNED | TESTED & PROVEN 45 FOR OVER 45 YEARS | AUSTRALIAN HARDWOOD

* Refer to the Weathertex Manufacturer's Warranty Conditions

a member of the green product community | VERIFIED PRODUCT FIND US ON ecospecifier .com.au | trust brands

PEFC PEFC/21-31-09

Quality System Quality Endorsed Company ISO 9001 Lic1864 SAI Global

Weathertex® is made in Australia by Weathertex Pty Ltd ABN 67 084 713 986 Masonite Road, Raymond Terrace NSW 2324

Updated on 19/08/2014